


❖ CX16型外型尺寸:


● 安装尺寸




● 非屏蔽电缆式(CX16ZL-F)

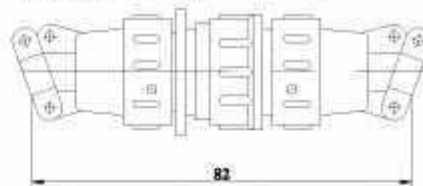


● 屏蔽仪器式(CX16Z-K)

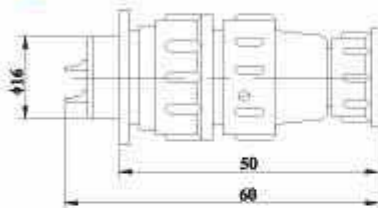

● 非屏蔽仪器式(CX16Z-F)

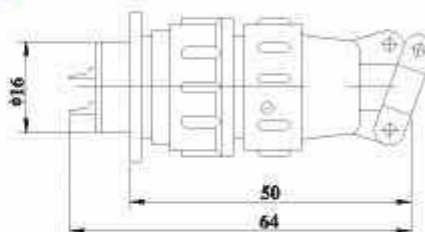

● 屏蔽电缆式(CX16ZL-K)

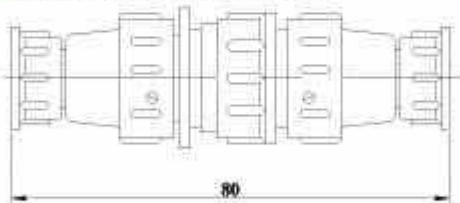

芯数	3芯	4芯	5芯	7芯	9芯
排列图					
额定电流A	5	5	5	5	5
接触对直径、数量	3	4	5	7	9
工作电压 (AC.V.rms)	500	500	500	500	500
耐压 (AC.V) 1min	1500	1500	1500	1500	1500
接触电阻mΩ	<5mΩ	<5mΩ	<5mΩ	<5mΩ	<5mΩ
绝缘电阻MΩ	>500MΩ	>500MΩ	>500MΩ	>500MΩ	>500MΩ