

MODEL TL-4903

International size reference: AA, ER14505



大豪电子
 电话: 0755-83233025
<http://www.szdahao.com>
<http://www.very-tec.com>

TADIRAN LITHIUM BATTERIES

TECHNICAL DATA



(Typical values @+25°C for batteries stored for one year or less)

- Nominal capacity @ 1 mA, to 2 V 2.4 Ah
- Rated voltage 3.6 V
- Maximum recommended continuous current 60 mA
- Maximum 1 sec. pulse capability 120 mA
- Weight 18 g (0.634 oz)
- Volume 8 cc
- Operating temperature range -55 °C to +85 °C
- U.L. Component Recognition, MH 12193

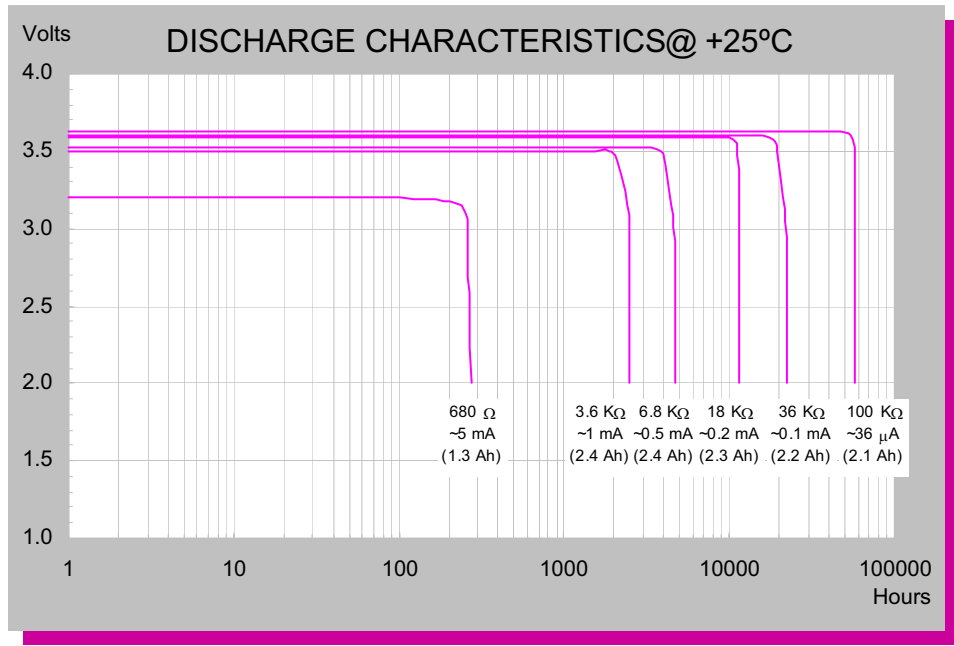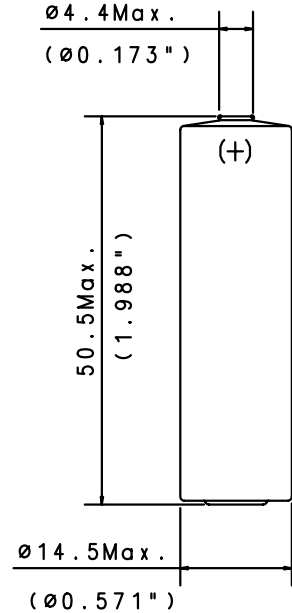

AVAILABLE TERMINATIONS

SUFFIX- /S STANDARD	15-4903-21000
SUFFIX- /T SOLDER TABS	15-4903-31000
SUFFIX- /P AXIAL PINS	15-4903-41000
SUFFIX- /PT2 RADIAL PINS	15-4903-36000
SUFFIX- /TP POLARIZED TABS	15-4903-52000
SUFFIX- /PT POLARIZED TABS	15-4903-53000

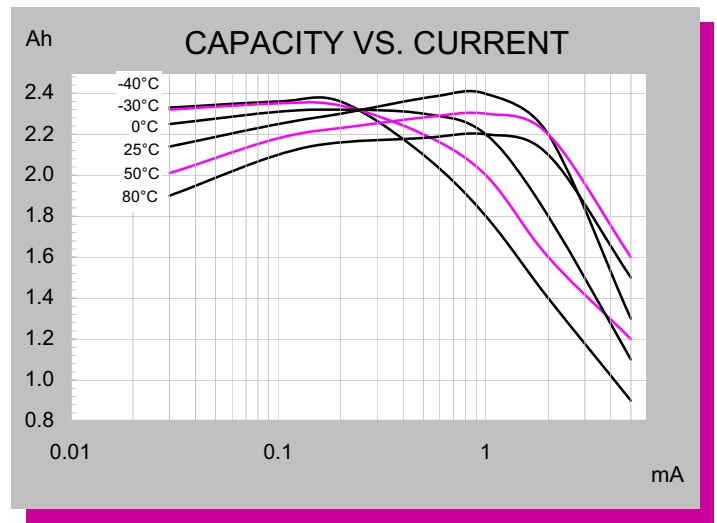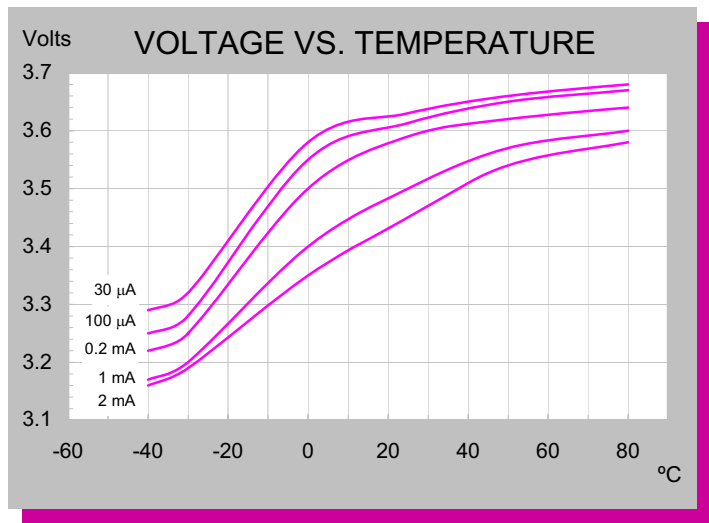

XOL - Extended Operating Life

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance. Rev. D 01/07 ECN1501458